

Model—HP-445 OPERABLE

102 mm DEEP HORIZONTAL BLADE LOUVER





WATER PENETRATION PERFORMANCE


- * Free Area Velocity at Beginning Point of Water Penetration: 761.2 fpm (3.87 m/s)
- * Air Volume Flow Rate at Beginning Point of Water Penetration — 48in x 48in unit:
6,485 cfm (3.06 m³/s)
- * Pressure Drop at Beginning Point of Water Penetration: 0.126 in. H₂O (32 Pa)

AIRFLOW PERFORMANCE

- * Free Area: 55% , based on a test sample of 48in (1219.2mm) x 48in (1219.2mm)
- * Airflow Classification—Class 2

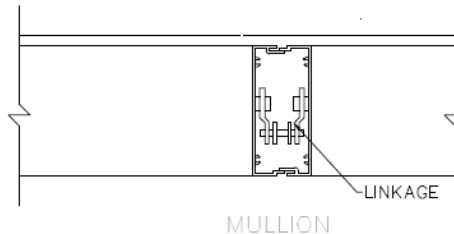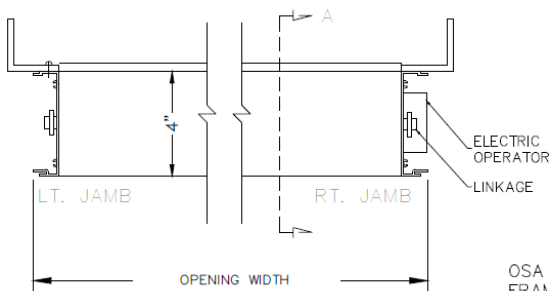

OSA EXTRUDED ALUMINUM ELECTRIC OPERATING LOUVER FRAMES AND BLADES TO BE FABRICATED FROM 6063-T6 ALLOY, WITH REINFORCING BOSSES AND A NOMINAL .081" (2mm) BLADE & FRAME THICKNESS. ALL FASTENERS TO BE STAINLESS STEEL.

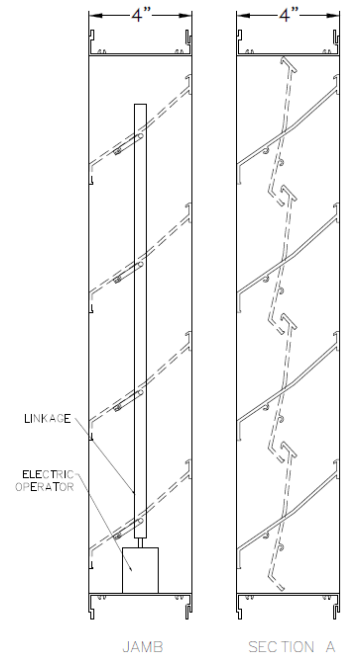

System Description:

OSA Rain high performance series; extruded aluminum construction; frame with channel profile; corner joints mitered and mechanically fastened, with continuous recessed caulking channel each side; intermediate mullions matching frame; gutters; rated for an air performance and water penetration maintained effectiveness rate tested in accordance with AMCA 500-L.

Material & Finishes:

- HP-445 OPERABLE comprises
 - Blades: 4" deep Horizontal Blade
 - Frame depth: 4" inches (102 mm)
- Metal Thickness: Frame 0.081 inch (2 mm); blades 0.081 inch (2 mm).
- Finish: PE-SDF / PVDF / Anodize after fabrication
- Color: As scheduled.
- Mullions: Concealed or Exposed.
- Screens: Bird mesh / Insect mesh
- Screen location: Interior
- Screening Material: Aluminium / Stainless Steel
- Electric Operator with Linkage System

Louver Construction:

- Wind Load Resistance: Design to resist +ve and -ve wind load of ___ psf (___ kPa) without damage or permanent deformation.
- Blades: One piece extrusions with reinforcing bosses, supported and lined up with heavy-gage extruded aluminum blade braces, positively interlocked to each blade and mechanically secured to structure by aluminum and stainless steel fastenings.
- Exposed edges and ends of metal dressed smooth, free from sharp edges.
- Exposed connections and joints constructed to exclude water.

Warranty:


OSA-McGill louvers warranted for 2 years against defective material and workmanship, and 20 Years for Finishes.

Model—HP-445 OPERABLE

102 mm DEEP HORIZONTAL BLADE LOUVER



		FREE AREA IN FT ² & M ²												
		WIDTH (IN & mm)												
		12	18	24	30	36	42	48	54	60	66	72	78	84
HEIGHT (IN & mm)		304.8	457.2	609.6	762	914.4	1066.8	1219.2	1371.6	1524	1676.4	1828.8	1981.2	2133.6
	12	0.30	0.48	0.66	0.84	1.02	1.20	1.38	1.56	1.74	1.92	2.10	2.28	2.46
	304.8	0.03	0.04	0.06	0.08	0.09	0.11	0.13	0.14	0.16	0.18	0.19	0.21	0.23
	18	0.54	0.86	1.18	1.5	1.82	2.14	2.46	2.78	3.11	3.43	3.75	4.07	4.39
	457.2	0.05	0.08	0.11	0.14	0.17	0.20	0.23	0.26	0.29	0.32	0.35	0.38	0.41
	24	0.83	1.34	1.84	2.34	2.84	3.34	3.84	4.34	4.84	5.34	5.84	6.35	6.85
	609.6	0.08	0.12	0.17	0.22	0.26	0.31	0.36	0.40	0.45	0.50	0.54	0.59	0.64
	30	1.07	1.71	2.36	3.00	3.64	4.28	4.93	5.57	6.21	6.85	7.50	8.14	8.78
	762	0.10	0.16	0.22	0.28	0.34	0.40	0.46	0.52	0.58	0.64	0.70	0.76	0.82
	36	1.37	2.19	3.01	3.84	4.66	5.48	6.30	7.13	7.95	8.77	9.59	10.41	11.24
	914.4	0.13	0.20	0.28	0.36	0.43	0.51	0.59	0.66	0.74	0.81	0.89	0.97	1.04
	42	1.61	2.57	3.53	4.50	5.46	6.42	7.39	8.35	9.32	10.28	11.24	12.21	13.17
	1066.8	0.15	0.24	0.33	0.42	0.51	0.60	0.69	0.78	0.87	0.95	1.04	1.13	1.22
	48	1.91	3.05	4.19	5.34	6.48	7.62	8.77	9.91	11.05	12.20	13.34	14.48	15.63
1219.2	0.18	0.28	0.39	0.50	0.60	0.71	0.81	0.92	1.03	1.13	1.24	1.35	1.45	
54	2.14	3.43	4.71	6.00	7.28	8.57	9.85	11.14	12.42	13.71	14.99	16.28	17.56	
1371.6	0.20	0.32	0.44	0.56	0.68	0.80	0.92	1.03	1.15	1.27	1.39	1.51	1.63	
60	2.44	3.91	5.37	6.84	8.30	9.76	11.23	12.69	14.16	15.62	17.09	18.55	20.02	
1524	0.23	0.36	0.50	0.63	0.77	0.91	1.04	1.18	1.32	1.45	1.59	1.72	1.86	
66	2.68	4.28	5.89	7.50	9.10	10.71	12.31	13.92	15.53	17.13	18.74	20.34	21.95	
1676.4	0.25	0.40	0.55	0.70	0.85	0.99	1.14	1.29	1.44	1.59	1.74	1.89	2.04	

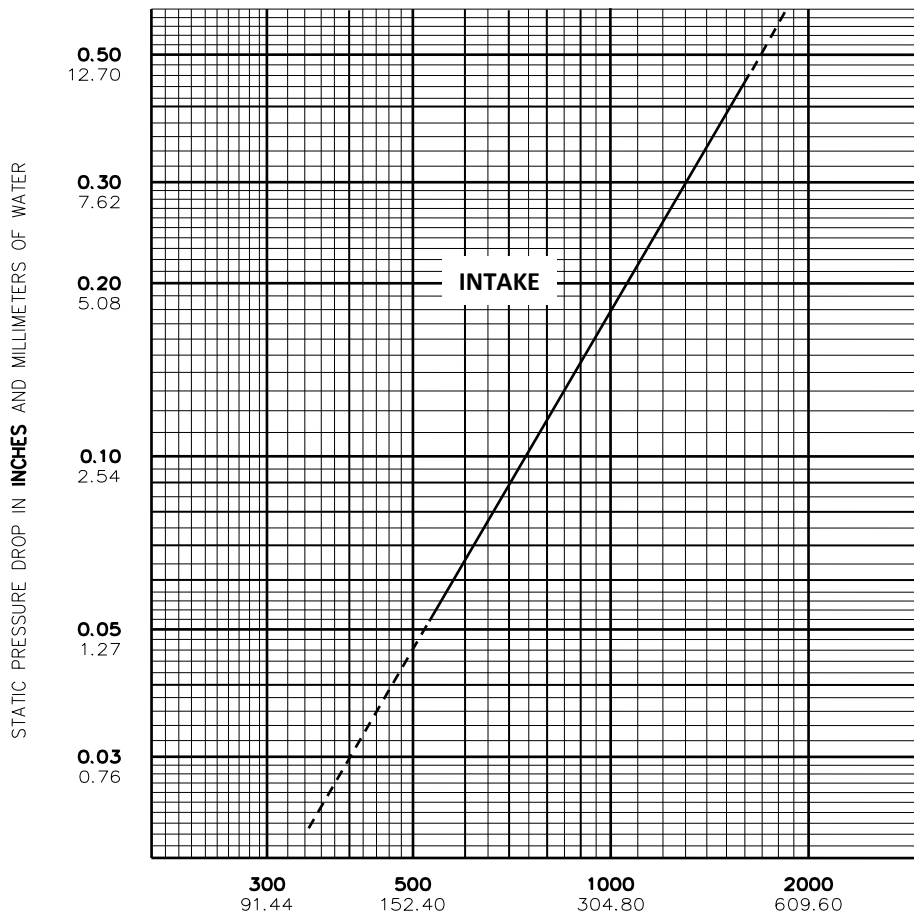

Test Data

Published data is in accordance with ANSI/AMCA 500-L, Figure 5.5. Data corrected to standard air density. Test Sample Size 48"x48"

The AMCA Water Penetration Test provides a method for comparing various louver models and designs as to their efficiency in resisting the penetration of rainfall under specific laboratory test conditions. The point of zero water penetration is defined as that velocity where the water penetration curve projects through .01 oz of water penetration per sq. ft. of louver area.

AIR VELOCITY IN FEET AND METERS PER MINUTE THROUGH FREE AREA

HP-445 OPERABLE; February 2015

Licensed manufacturer for McGill Architectural Products, 1050 Squires Beach Rd. S., Pickering, ON L1W 3N8,

Tel. 905-420-0485 / 1-888-624-4557 Fax. 905-420-4564 / 1-888-624-4558, www.mcgillarchitectural.com