


MODEL : FGS & FWGS

Description:

Surface mounted joint covers with exposed and aluminum frames for retrofit application.

Technical Data:

- Metals :Extruded Aluminum - 6063-T6 ASTM B221
- Elastomeric Seals: Dual Durometer Gasket

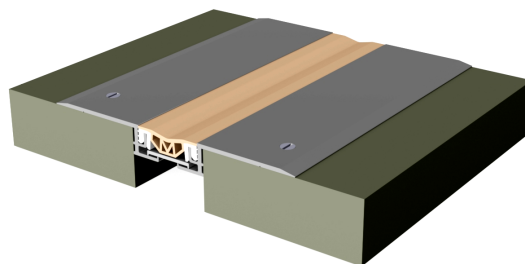

Point Load Rating:

- 550lbs

retrofit



Compliant



Dual Durometer



Load Rating

Material Finishes:

- Aluminum in Clear Anodized finish
- Dual durometer gasket is available in black, gray, beige and white* colors

Limitations:

- Standard length 3 meter
- Maximum length 6.1 meter

Optional Accessories:

- Moisture barrier, fire barrier

Installation:

See manufacturer's standard installation instructions.

Key Features:


- Highly durable dual durometer gasket
- Internal baffles for maximum movement
- Integral water stop design
- Downward gasket contraction at maximum compression
- Central support for enhanced point load function for 2" and above covers

Applications:

- Designed for retrofit application
- Where hygiene is important
- Wheeled equipment trafficable areas
- Where minimal visual impact is preferred
- Suitable for gap sizes of 1", 2" & 2.5"

Model	Min Joint Opening	Nominal Joint Width (W)	Max Joint Opening	Exposed Surface (ES)	Overall Width	Overall Height
FGS1	0.75"(19mm)	1.00"(25mm)	1.25"(32mm)	5.75"(146mm)	5.75"(146mm)	N/A-Surface Mount
FGS2	1.50"(38mm)	2.00"(51mm)	2.50"(64mm)	6.75"(171mm)	6.75"(171mm)	N/A-Surface Mount
FGS2.5	1.80"(46mm)	2.50"(64mm)	3.00"(76mm)	7.25"(184mm)	7.25"(184mm)	N/A-Surface Mount
FWGS1	0.75"(19mm)	1.00"(25mm)	1.25"(32mm)	3.38"(86mm)	3.38"(86mm)	N/A-Surface Mount
FWGS2	1.50"(38mm)	2.00"(51mm)	2.50"(64mm)	4.38"(111mm)	4.38"(111mm)	N/A-Surface Mount
FWGS3	1.80"(46mm)	2.50"(64mm)	3.00"(76mm)	4.87"(124mm)	4.87"(124mm)	N/A-Surface Mount

Floor to Floor

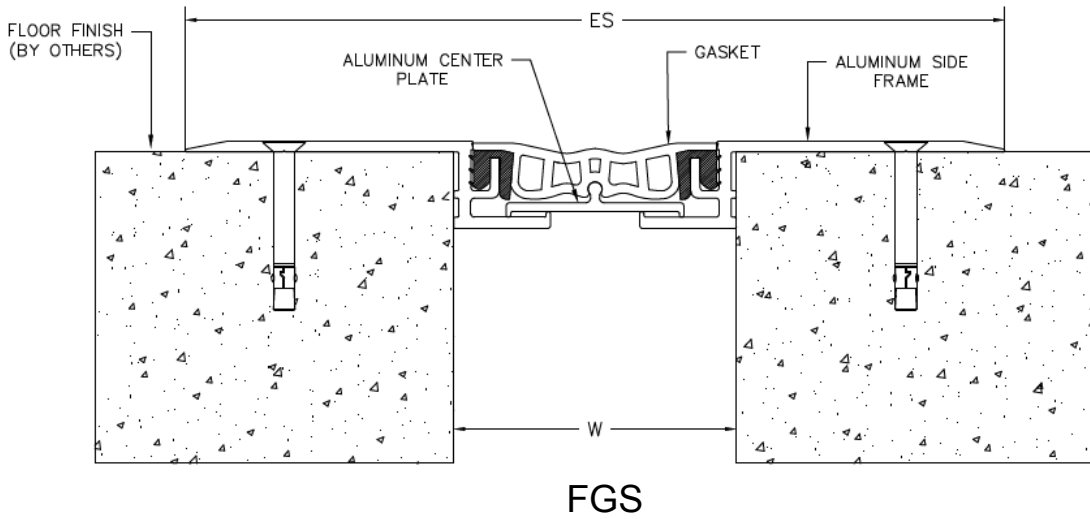

Floor to Wall

