

MODEL : PFZ & RWXT

Description:

Single extruded winged EPDM elastomeric seal with integral web and serration, designed for parking deck applications.

The serrated edges create reservoirs for housing of epoxy for better adhesion to concrete

Technical Data:

- Elastomeric seals: EPDM
- Adhesive :Epoxy

Point Load Rating:

- 2200lbs (1000kg)

Material Finishes:

- EPDM gasket is available in black color

Limitations:


- Standard length 6 meter
- Maximum length 15 meter

Optional Accessories:

- Fire barrier

Installation:

See manufacturer's standard installation instructions.

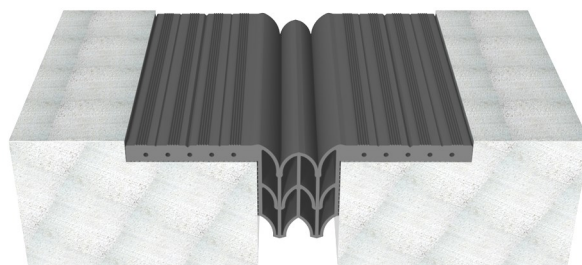

Load Rating

Key Features:


- Can be exposed to Sun light
- Movement +/- 50%
- NON elastomeric concrete application

Applications:

- Designed for open air parking structures
- Suitable for gap sizes of 1",2",3" & 4"


Model	Min Joint Opening	Nominal Joint Width (W)	Max Joint Opening	Exposed Surface (ES)	Overall Width	Overall Height
PFZ1	0.50"(13mm)	1.00"(25mm)	1.50"(38mm)	7.71"(196mm)	7.71"(196mm)	2.50"(64mm)
PFZ2	1.00"(25mm)	2.00"(51mm)	3.00"(76mm)	8.87"(225mm)	8.87"(225mm)	3.00"(76mm)
PFZ3	1.50"(38mm)	3.00"(76mm)	4.50"(114mm)	9.71"(247mm)	9.71"(247mm)	2.50"(64mm)
PFZ4	2.00"(51mm)	4.00"(102mm)	6.00"(152mm)	10.71"(272mm)	10.71"(272mm)	3.50"(89mm)
PWFZ1	0.50"(13mm)	1.00"(25mm)	1.50"(38mm)	4.35"(111mm)	4.35"(111mm)	2.50"(64mm)
PWFZ2	1.00"(25mm)	2.00"(51mm)	3.00"(76mm)	5.52"(140mm)	5.52"(140mm)	3.00"(76mm)
PWFZ3	1.50"(38mm)	3.00"(76mm)	4.50"(114mm)	6.35"(161mm)	6.35"(161mm)	2.50"(64mm)
PWFZ4	2.00"(51mm)	4.00"(102mm)	6.00"(152mm)	7.35"(187mm)	7.35"(187mm)	3.50"(89mm)

Floor to Floor

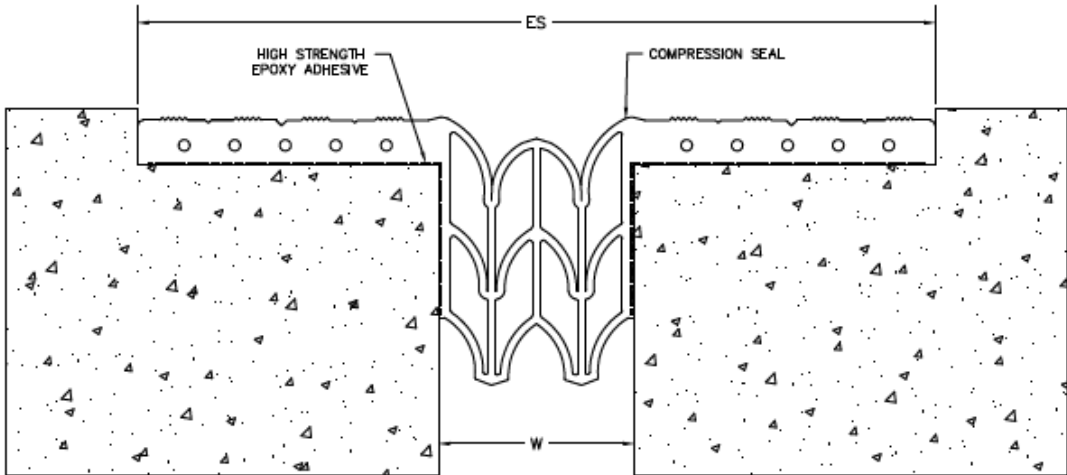

PFZ

Floor to Wall

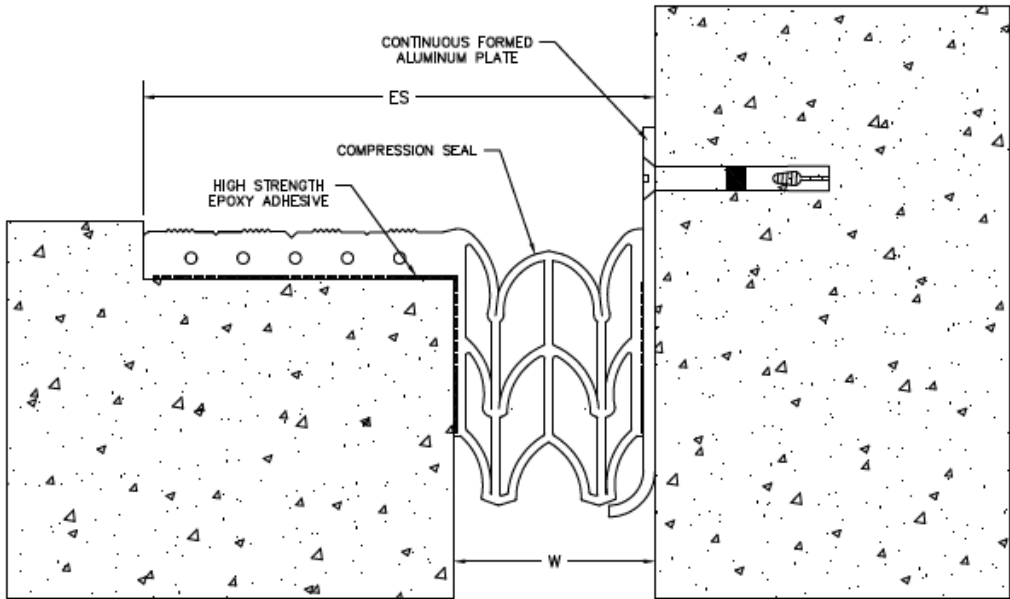

PWFZ