



Model—VS-220

52mm DEEP VISION SCREEN



AIRFLOW PERFORMANCE

- * Free Area : 55%, based on a sample of 48 in. (1220mm) x 48 in. (1220mm)
- * Discharge loss coefficient Classification—Class 2

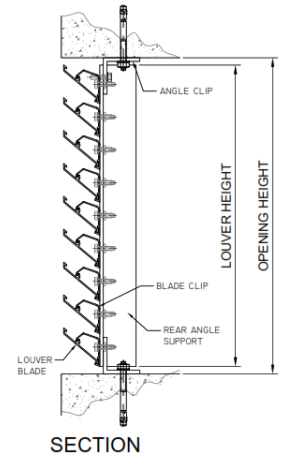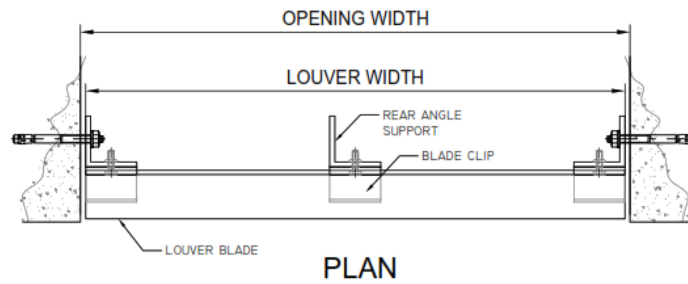

FEATURES:

- Continuous blade assembly
- Good sight-proofing characteristics

Material & Finishes:

1. VS-220 SCREEN comprises
 - a. Blades: 2" deep reverse slope sight-proof
2. Metal Thickness: Mullion 0.081 inch (2.0 mm); blades 0.06 inch (1.52 mm).
3. Finish: PE-SDF / PVDF after fabrication
4. Color: As scheduled.
5. Mullions: Concealed
6. Screens: Bird mesh / Insect mesh AVAILABLE AS OPTIONAL ACCESSORIES.
7. Screen location: Interior
8. Screening Material: Aluminium / Stainless Steel

Louver Construction:

1. Wind Load Resistance: Design to resist +ve and -ve wind load of ___ psf (___ kPa) without damage or permanent deformation.
2. Blades: One piece extrusion blades with reinforcing bosses snap-locked to heavy-gage extruded aluminum blade braces, attached to structural supports. Each blade brace is mechanically secured to structure using stainless steel fastenings.
3. Supplied semi-knocked down for field assembly.
4. Mitered corners
5. Exposed edges and ends of metal dressed smooth, free from sharp edges.

Warranty:

OSA louvers warranted for 5 years against defective material and workmanship, and 20, 25 or 30 Years for Finishes Depending on Finish Selection.