Model—VS-660

157mm DEEP VISION SCREEN

AIRFLOW PERFORMANCE

* Free Area : 60%, based on a sample of 48 in. (1220mm) x 48 in. (1220mm)
* Discharge loss coefficient Classification—Class 2

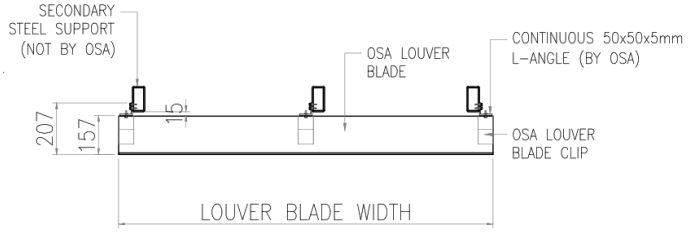

SEC TION A

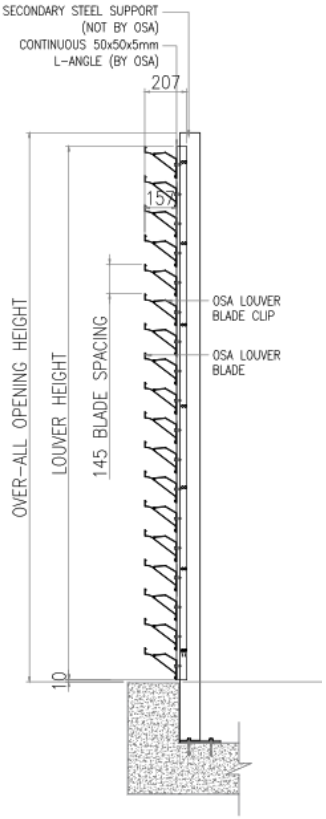

SEC TION B

FEATURES:

- Continuous blade assembly
- Good sight-proofing characteristics

Material & Finishes:

1. VS-660 SCREEN comprises
   a. Blades: 6” deep reverse slope sight-proof
2. Metal Thickness: Mullion 0.081 inch (2.0 mm); blades 0.081 inch (2.0 mm).
3. Finish: PE-SDF / PVDF after fabrication
4. Color: As scheduled.
5. Mullions: Concealed
6. Screens: Bird mesh / Insect mesh AVAILABLE AS OPTIONAL ACCESSORIES.
7. Screen location: Interior
8. Screening Material: Aluminium / Stainless Steel

Louver Construction:

1. Wind Load Resistance: Design to resist +ve and –ve wind load of ___ psf (___kPa) without damage or permanent deformation.
2. Blades: One piece extrusion blades with reinforcing bosses snap-locked to heavy-gage extruded aluminum blade braces, attached to structural supports. Each blade brace is mechanically secured to structure using stainless steel fastenings.
3. Supplied semi-knocked down for field assembly.
4. Mitered corners
5. Exposed edges and ends of metal dressed smooth, free from sharp edges.

Warranty:

OSA louvers warranted for 5 years against defective material and workmanship, and 20, 25 or 30 Years for Finishes Depending on Finish Selection.